SCHOMBURG GmbH & Co. KG Aquafinstrasse 2 - 8 D-32760 Detmold (Germany)

phone +49-5231-953-00 fax +49-5231-953-108

email export@schomburg.de www.schomburg.com






## **Technical Drawing 3.50.1**

## Wiesbaden channel

Wear classes A, B and water impact classes W3-I, W1-B and W2-B

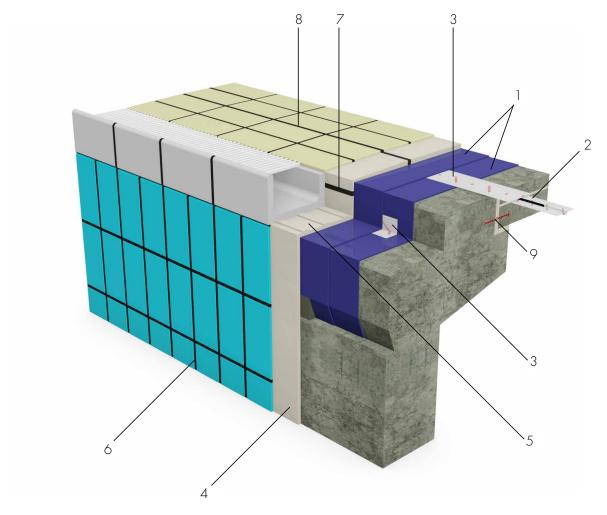

- 1 Waterproofing with AQUAFIN-2K/M-PLUS or AQUAFIN-RS300\*
- 2 ASO-Joint-Tape-2000-S inlay
- 3 ASO-Joint-Tape-2000 inlay
- 4 SOLOFLEX or UNIFIX-S3 thin-bed mortar
- 5 Channel laid in the mortar bed from ASO-EZ4-PLUS
- 6 HF05-Brillantfuge or ASODUR-EK98 joint mortar
- 7 ASODUR-EP/FM capillary-breaking joint filler
- 8 ESCOSIL-2000-UW elastic grouting compound
- 9 Concrete joint strip

<sup>\*</sup> water depth of up to 6 m