


Pipe penetration waterproofing with **COMBIFLEX®-High Build System**

– According to factory specifications –

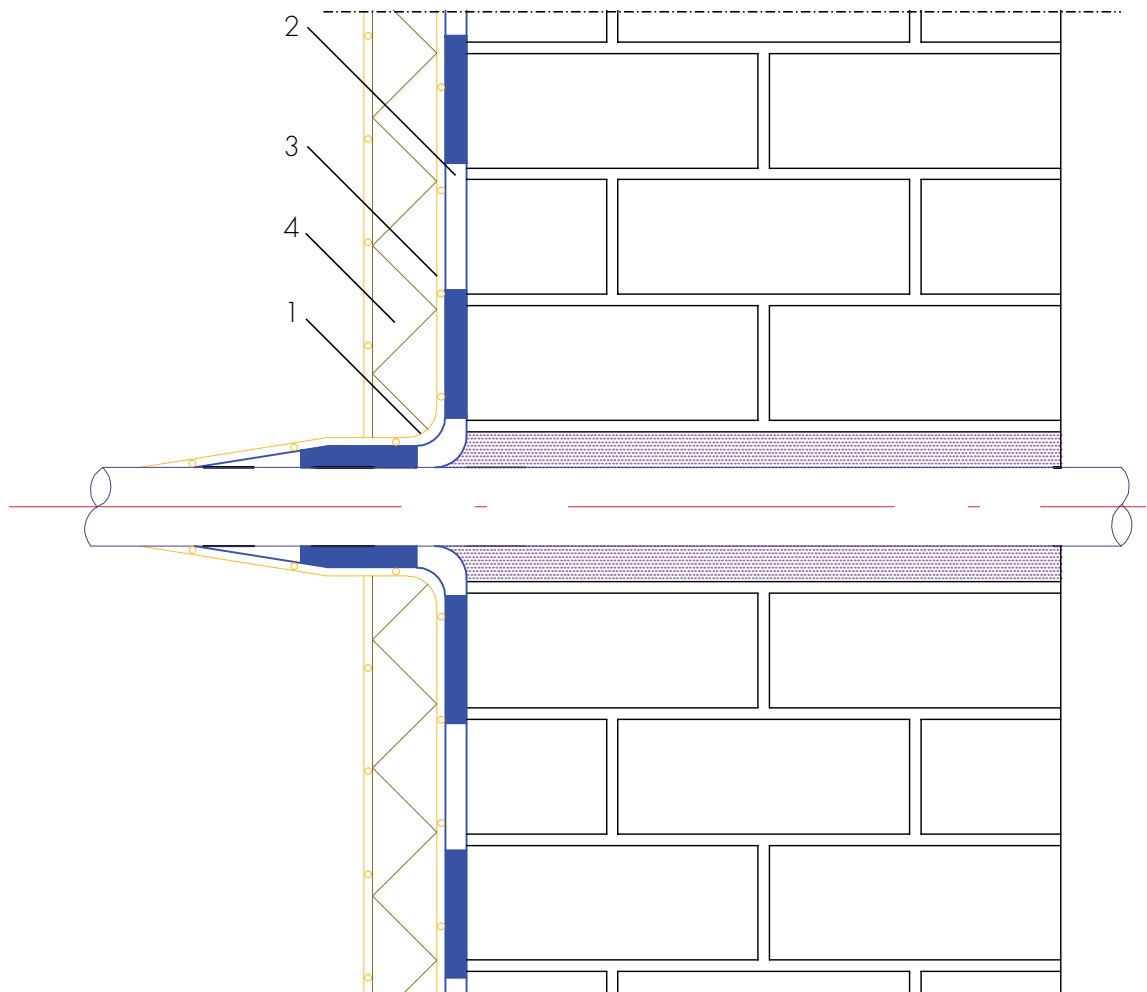

- 1 Coved fillet with $R \geq 4$ cm formed with ASOCRET-RN cementitious mortar
- 2 Waterproofing COMBIFLEX-High Build System
- 3 ASO-Systemvlies-02 protective mesh layer installed on the fresh COMBIFLEX waterproofing
- 4 Waterproofing protection layer through suitable measures