SCHOMBURG GmbH & Co. KG Aquafinstrasse 2 - 8 D-32760 Detmold (Germany) phone +49-5231-953-00

+49-5231-953-108

email export@schomburg.de www.schomburg.com




SCHOMBURG



Technical Drawing 1.4.4

New-build basement waterproofing, brick basement with perimeter insulation

Single-shell masonry, plastered

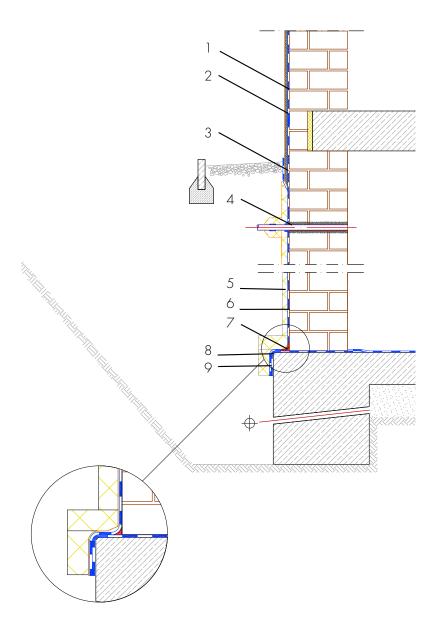

- 1 Building skirt render ASOCRET-M30 -Protection of the waterproofing from damage and visual design of the building skirt area
- 2 Waterproofing from spray water at the wall skirting - AQUAFIN-RB400 - Protection of the building envelope from damp and foreign
- Moisture protection AQUAFINRB400 -Protection of the building skirt render from water penetration from behind
- 4 Waterproofing the intersection -ADF-pipe-sleeve - Seamless connection of the intersection to the building waterproofing
- 5 Protection of the waterproofing Insulation, protection and drainage boards - Protects the waterproofing from damage
- 6 Building waterproofing in contact with the ground - AQUAFIN-RB400 - Twolayer waterproofing to protect the building envelope from moisture and water
- Sealing cove radius 4-6 cm -ASOCRET-M30 - Sealing cove in the wall/ base transition and all internal corners made of water-repellent mortar to accommodate the waterproofing
- 8 External corner, chamfered Chamfering of all external corners to accommodate the building waterproofing
- 9 Waterproofing on front side of floor slab - AQUAFIN-RB400 - Waterproofing the front side of the floor slab/foundations to safeguard the transition to the wall material