SCHOMBURG GmbH & Co. KG Aquafinstrasse 2-8 D-32760 Detmold (Germany) phone +49-5231-953-00

+49-5231-953-108


email export@schomburg.de www.schomburg.com





Technical Drawing 2.1.2

Restoration basement waterproofing, external waterproofing, internal borehole barrier

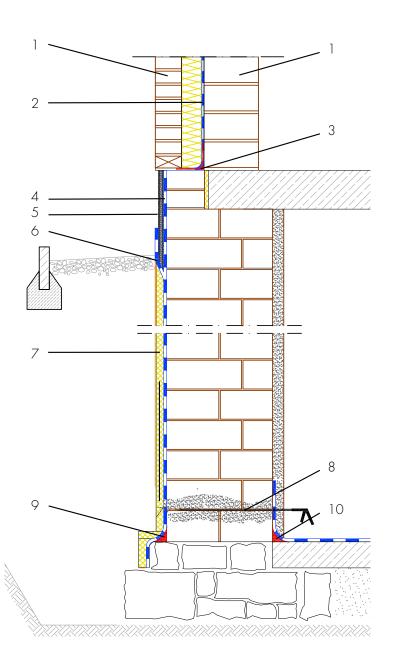

- 1 Backing masonry/front wall shell
- 2 Backing masonry waterproofing -AQUAFIN-RB400 - Protection of the building envelope from damp and foreign
- Sealing cove radius 4-6 cm -ASOCRET-M30 - Sealing cove in the wall/ base transition and all internal corners made of water-repellent mortar to accommodate the waterproofing
- 4 Waterproofing from spray water at the wall skirting - AQUAFIN-RB400 - Protection of the building envelope from damp and foreign
- 5 Building skirt render ASOCRET-M30 -Protection of the waterproofing from damage and visual design of the building skirt area
- 6 Moisture protection AQUAFIN-RB400 -Protection of the building skirt render from water infiltration from the rear
- 7 Protection of the waterproofing Insulation, protection and drainage boards - Protects the waterproofing from damage
- 8 Retrospective horizontal barrier -AQUAFIN-i380 - Installation of a retrospective horizontal barrier to prevent capillary rise of moisture in masonry
- Sealing cove radius 4-6 cm -ASOCRET-M30 - Sealing cove in the wall/ base transition and all internal corners made of water-repellent mortar to accommodate the waterproofing
- 10 Locking groove and sealing cove -ASOCRET-M30 - Locking groove and rounding of the internal corner