SCHOMBURG GmbH & Co. KG Aquafinstrasse 2 - 8 D-32760 Detmold (Germany) phone +49-5231-953-00 fax +40-5231-953-108

**SCHOMBURG** 


fax +49-5231-953-108 email export@schomburg.de www.schomburg.com



## **Technical Drawing 1.4.7**

## New build basement waterproofing, concrete basement with perimeter insulation

Single-shell masonry with composite thermal insulation system

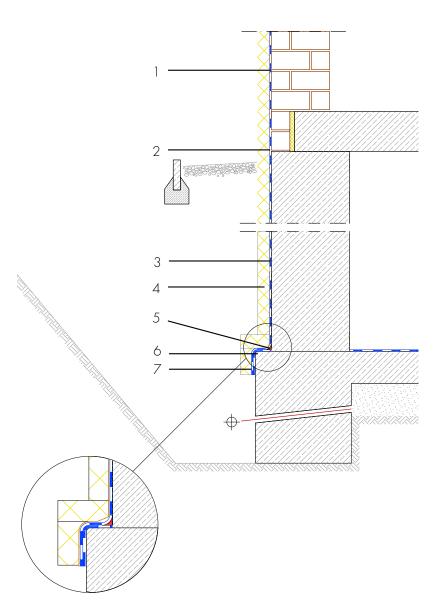

- Waterproofing from spray water at the wall skirting - AQUAFIN-RB400 - Protection of the building envelope from damp and foreign matter
- 2 Transition to concrete structure -ASO-reinforcing-insert - Reinforcement of the waterproofing in the transition area between masonry and concrete
- 3 Building waterproofing in contact with the ground - AQUAFIN-RB400 - Twolayer waterproofing to protect the building envelope from moisture and water
- 4 Protection of the waterproofing Insulation, protection and drainage boards Protects the waterproofing from damage
- 5 Sealing cove radius 4-6 cm -ASOCRET-M30 - Sealing cove in the wall/ base transition and all internal corners made of water-repellent mortar to accommodate the waterproofing
- 6 External corner, chamfered Chamfering of all external corners to accommodate the building waterproofing
- 7 Waterproofing on front side of floor slab - AQUAFIN-RB400 - Waterproofing the front side of the floor slab/foundations to safeguard the transition to the wall material