


## Technical Drawing 1.4.8

# New build basement waterproofing, base point, protruding floor slab

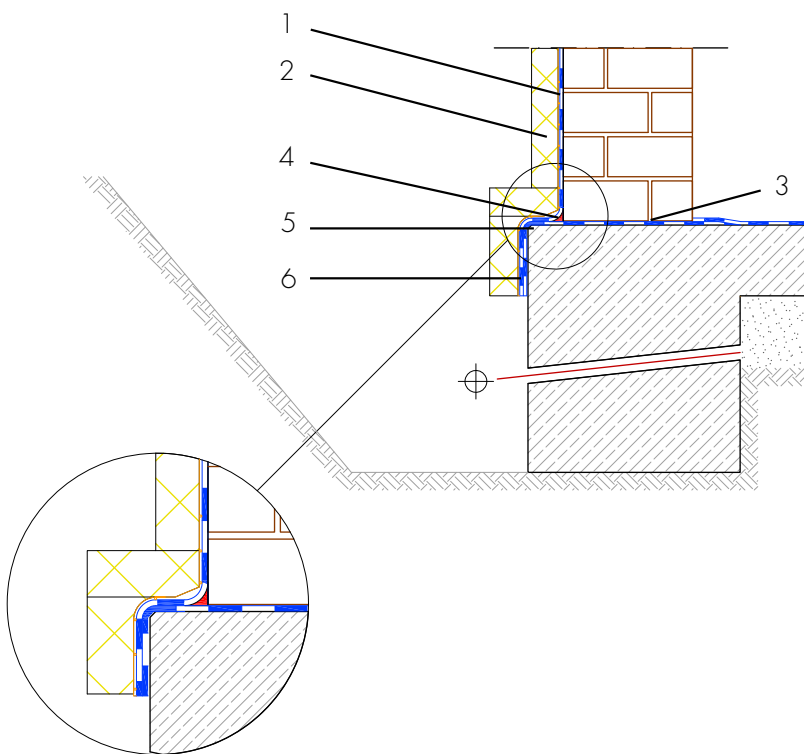

- 1 Building waterproofing in contact with the ground - AQUAFIN-RB400 - Two-layer waterproofing to protect the building envelope from moisture and water
- 2 Protection of the waterproofing - Insulation, protection and drainage boards - Protects the waterproofing from damage
- 3 Horizontal barrier under walls - AQUAFIN-RB400 - Protection from capillary rising water
- 4 Sealing cove radius 4-6 cm - ASOCRET-M30 - Sealing cove in the wall/base transition and all internal corners made of water-repellent mortar to accommodate the waterproofing
- 5 External corner, chamfered - Chamfering of all external corners to accommodate the building waterproofing
- 6 Waterproofing on front side of floor slab - cementitious waterproofing slurry or bitumen - Waterproofing the front side of the floor slab/foundations to safeguard the transition to the wall material