


# Sealing of underwater floodlights with joint filling (Custom solution)

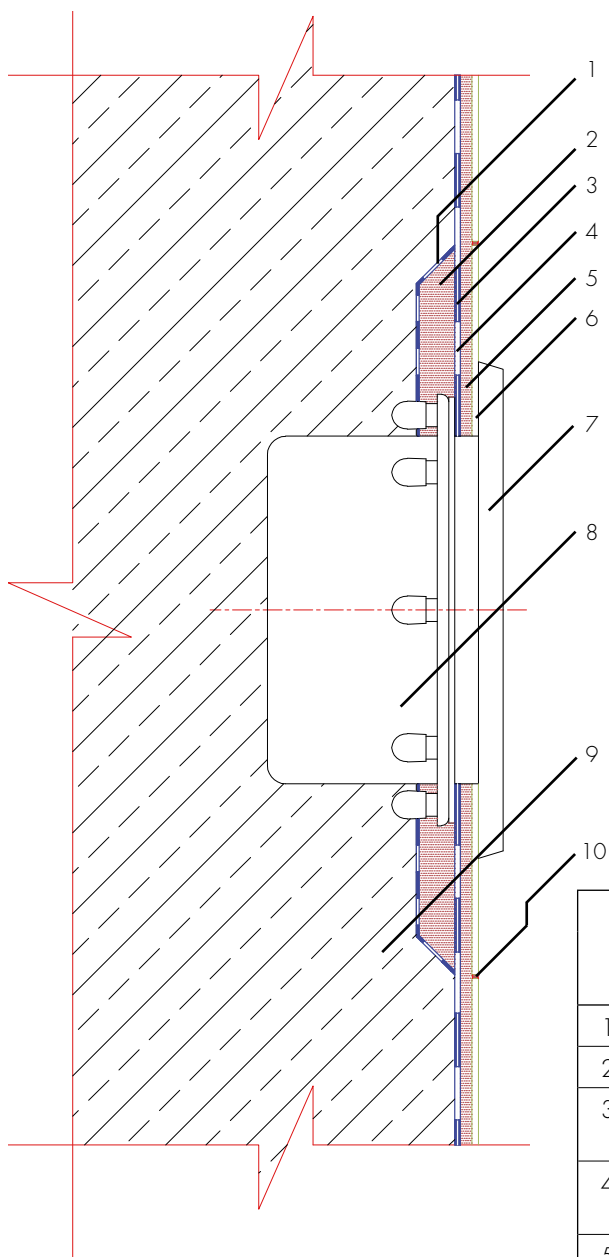

	Bathing water	
	per DIN 19643	Brine and thermal water
1	ASODUR-SG2-thix primer, sanded with quartz sand 0.5 - 1.0 mm	
2	Joint filling with ASOFLEX-SDM	
3	Bed in and coat ASO sealing sleeve with ASOFLEX-AKB-Wall; sprinkle with quartz sand 0.5 - 1.0 mm	
4	Bonded waterproof system	AQUAFIN-2K/M-PLUS ASOFLEX-AKB
5	Thin-bed mortar	UNIFIX-S3 ASODUR-EK98
6	Tiles	
7	Trim	
8	Floodlight enclosure	prime with INDU-Primer-N
9	Concrete pool	
10	Grouting	HF05-Brillanfuge ASODUR-EK98 / ASODUR-DESIGN

The rights of the buyer with regard to the quality of our materials are based on our terms and conditions of sale and delivery. This description is a non-binding sample description. It does not claim to be complete. This description does not release the user from their duty of care. This version becomes invalid in the event of a new version being issued.