



AQUAFIN®-Primer

Safety primer for building waterproofing and restoration

Safety primer for building
waterproofing and
restoration

AQUAFIN®-Primer

Safely preparing substrates

AQUAFIN-Primer is the optimal solution for the safe preparation of cementitious substrates for subsequent waterproofing and restoration work. The primer is ideally suited for use on weak and highly absorbent cementitious substrates such as concrete or masonry work.

AQUAFIN-Primer is ready to use, quick drying and acts as a substrate consolidator. The capillary absorbency is reduced on the surface and at the same time improves the substrate adhesion for subsequent layers.



Technical data

Product components	1 K system, ready for use
Base material	Silicate dispersion
Consistency	Liquid
Density	approx. 1 kg/dm ³ (specific weight)
Overcoat after	approx. 30 minutes after matt damp drying
Consumption (primer)	approx. 200-250 g/m ²
Package type	1, 5, and 10 l container

Advantages for the user

Improves the bonding of subsequent waterproofing and mortar layers

No mixing required, apply directly

Can be quickly overcoated



Areas of application

- As a primer on weak and highly absorbent substrates
- Suitable for all cementitious substrates such as concrete and masonry work
- For dry and matt damp substrates
- For horizontal and vertical surfaces
- For interior and exterior use
- For substrate preparation for waterproofing with flexible polymer modified thick layer coating (FPD) such as AQUAFIN-RB400 and cementitious waterproofing slurry (MDS) such as AQUAFIN-1K or ASOCRET-M30 multi-mortar
- As a component in the THERMOPAL restoration plaster systems


Properties

- Reduces the capillary absorbency on the surface
- Ready to use
- Rapid drying
- Improved adhesion
- Substrate consolidating
- Dust binding
- Solvent-free
- Vapour permeable

Safe and rapid work progress

Improved adhesion

AQUAFIN-Primer improves the bonding to the substrate for subsequent waterproofing layers.

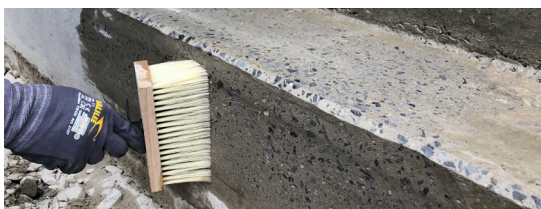


Substrate consolidating

AQUAFIN-Primer consolidates the treated surface due to its special formulation and thus results in improved bonding for subsequent layer applications.



Rapid overcoating

AQUAFIN-Primer soaks in rapidly after application and makes rapid work progress within only 30 minutes possible.

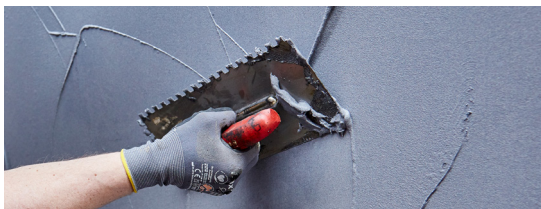

SCHOMBURG GmbH & Co. KG
Aquafinstraße 2-8
D-32760 Detmold (Germany)
Telephone +49-5231-953-00
Fax +49-5231-953-108
www.schomburg.com



 **SCHOMBURG**