


ASO®-FF

Fibre filler / thixotropic agent

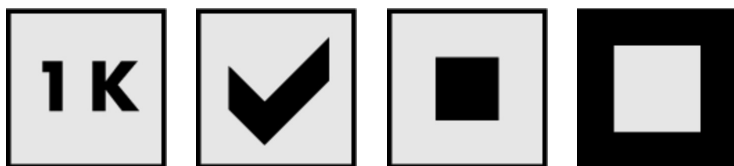

Material number	Contents	Unit of quantity	Packaging	Colour
206410001	2	KG	Bag	White
206410002	10	KG	Bag	White

Product features

- Fibre filler
- made of PE-fine fibres
- Plasticiser-free

Advantages

- Run-off and flow behaviour can be controlled
- Simple dosing and mixing

Areas of application

- for the production of non slump levelling compounds
- for the thickening and thixotroping of all solvent-free ASODUR coatings
- for thixotropic application of self-levelling ASODUR coatings and primers

ASO[®]-FF

Technical Data

Material properties

Product components	Ready to use
Base material	Polyethylene (PE)
Consistency	powdery, very short-cut fibre structure

Application

Consumption	The amount to be added is approx. 0.1 up to max. of 10 wt.% depending on the layer thickness to be applied and the angle of inclination of the coating substrate.
-------------	---

Application technology

Aids/tools

- Stirrer
- Circular cage

Substrate preparation

Measures for substrate preparation

The substrate preparation is carried out according to the technical data sheet of the combined product.

Usage

Application

Mix ASO[®]-FF evenly and without lumps into the coating material using a suitable stirrer. The amount to be added is approx. 0.1-10 wt.% depending on the layer thickness to be applied and the angle of inclination of the coating substrate.

Storage conditions

Storage

Store in a cool and dry place. At min. 10 - 25 °C min. 36 months in the original container. Promptly use opened container.

Disposal

Product leftovers can be disposed of in household waste.

Notes

- Observe the technical data sheets of the products mentioned before starting work.
- Applications that have not been clearly mentioned in this technical data sheet may only be carried out after the technical service department of SCHOMBURG GmbH has been consulted, and after the said department has approved of such a course of action in writing.

The recognised standards of construction engineering, the relevant guidelines and current regulations must be observed.

The rights of the buyer with regard to the quality of our materials are based on our terms and conditions of sale and delivery. Our technical advice team will be happy to advise you in the case of requirements that exceed the scope of the application described here. In order to be binding, a legally binding written confirmation is required. The product description does not release the user from a duty of care. Lay a test area in the event of uncertainty. This version becomes invalid in the event of a new version being issued.